

## **Chain Tensioner - GT**

The GT chain tensioner from Gunnebo Industries is integral in one set. It is made of high strength Grade 10 material and the ratchet handle contributes to a fast and ergonomic lashing procedure. The GT is fitted with safety pins to prevent unintended release of the threaded end fittings.

GT has 25% increased Lashing Capacity (LC) compared to Grade 80 lashings and high Standard Tension force (STF) thanks to the unique ratchet handle, and 43% increase LC compared to a grade 70 lashing system.

Our chain tensioner is designed to be compatible with the GrabiQ product range, enabling the choice of robust end-hooks with latches. Can also be provided as approved for lifting purposes.

See website or user instructions for assembly instructions.

Meets listed current specifications and standards at time of publication of this catalogue.



Unique Benefits with our Chain Tensioner



### **Short Handle**

- Fully protected ratched mechanism with 8 steps per 90 degree pull, enabling use in very narrow spaces.
- Easy to change direction.
- The rubber handle decreases the risk of slipping and is convenient in cold climates.

### Open Design

- For easier and faster cleaning and lubrication.
- Allows dirt to fall through instead of building up.
- Two drain holes in the body prevent water residue.


### Trapezoidal Thread

- Makes the thread less sensitive to dirt and particles.
- Low-friction treated for trouble free operation.
- Makes lashing faster.
- Safety pins prevents unintended unwinding.

# **Chain Lashing System**

Gunnebo Industries offers a complete chain lashing system approved according to EN 12195-3. The system has been developed with focus on the user's needs and working environment, and with safety as highest priority. The unique Midgrab chain shortener saves valuable time and effort, and is a natural part of an efficient and effective chain lashing system.


GT Chain Lashing System offers 25% increased Lashing Capacity (LC) compared to Grade 80 lashings, and 43% increased capacity compared to Grade 70 lashings.

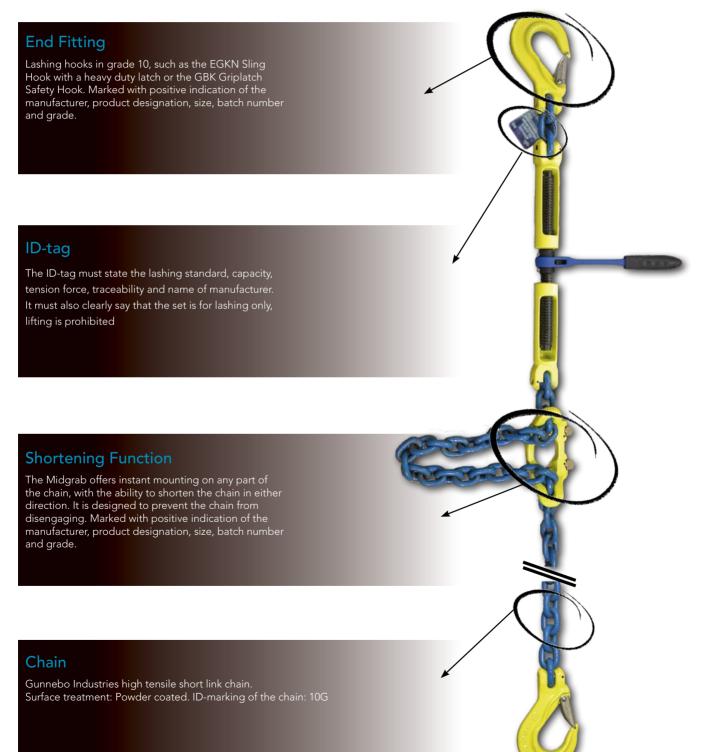

Ö







### **Chain Tensioner GT**

Art. no Model		Lashing capacity (lb)	L = Min. length	L = Max. length	Weight (lb)	
Z101336	GT-8-10	11 240	15.75	23.62	7.28	
Z101337	GT-10-10	17 984	15.75	23.62	7.28	




### Chain, GrabiQ Grade 10 (200)

Short link, KL

Art. no.	Code	WLL lb*	Lashing capacity (lb)	d nom.	Р	w1	Weight lb/foot	MPF kN
Z802301	KLA-8-10	5 700	11 240	0.31	0.94	0.43	0.94	63
Z802302	KLA-10-10	8 800	17 984	0.39	1.18	0.55	1.55	98

Fulfills the requirements in ASTM A973/A973M-07(2012) EN 818+2:2008 (WLL +25%, reduced temperature range).

## See our Full Range of Chain in Chapter 5





### Midgrab MIG with locking pins

Art. no.	Code	WLL lb*	Lashing capacity (lb)	L	Х	Υ	Weight lb
B14303	MIG CC-8-10	5 700	25 178	3.74	1.97	2.36	1.54
B14313	MIG CC-10-10	8 800	39 565	4.92	2.76	3.03	2.43





Lashing Chain GrabiQ with hooks in both ends

