



Connecting Link V

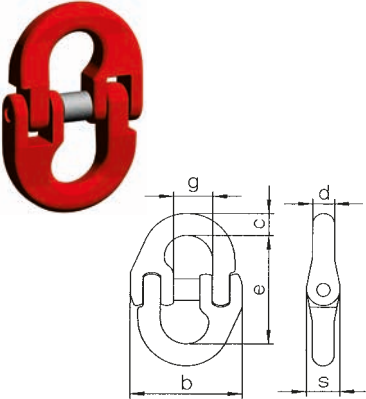

Chain		Code	Measurements						Weight	Working Load Limit
mm	inch		g	s	b	e	c	d		
6	1/4	V 06.8 U	14.1	11	39	44.4	7.8	7.6	0.06	1,120
7	9/32	V 07.8 U	17	13	47	51	10	9	0.12	1,500
8	5/16	V 08.8 U	18.35	14	55	61.5	11.5	10	0.18	2,000
10	3/8	V 10.8 U	23	18	64	72	12.6	12.6	0.33	3,150
13	1/2	V 13.8 U	27.6	22	79	88	19	16.7	0.7	5,300
16	5/8	V 16.8 U	33	29	106	103	21	21	1.14	8,000
20	3/4	V 20.8 U	41.7	35	123	115	29.5	23.5	2.1	12,500
22	7/8	V 22.8	48	39	150	133	27	27	2.2	15,000
26	1	V 26.8 U	61	46	159	164	32	30	5.1	21,200
32	1 1/4	V 32.8 U	80	50	195	194	40	32	8.5	31,500

Webbing Coupling Link RSK

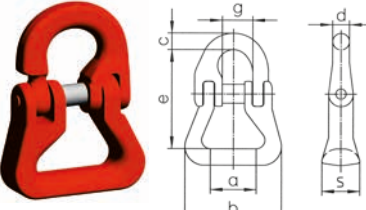

Chain		Code	Measurements						Weight	Working Load Limit	
mm	inch		b	e	s	a	g	d			c
8	5/16	RSK 08.8 U	68	66	18	29	19	10	12	0.3	2,000
10	3/8	RSK 10.8 U	82	81	21	40	23	12.6	12.6	0.5	3,150
13	1/2	RSK 13.8 U	100	104	28	50	28	16.5	19.5	1.10	5,300
16	5/8	RSK 16.8 U	110	112.5	40	47	33	21	21	2	8,000